



Sewn construction and reliability at an affordable price

Eaton's SNAP-RING filter bags are suitable for a wide range of applications such as the filtration of paints and varnishes, inks, chemicals, solvents and many more.

SNAP-RING filter bags are manufactured to the highest standards. Materials must meet stringent specifications for filtration performance and media purity. Production under ISO 9001:2008 quality systems ensures reliability and repeatability from order to order, year after year.

Features and benefits

- Heavy-duty sewing thread and the metal seal ring are produced to Eaton specification
- The SNAP-RING seal ring adapts to any bag filter housing
- Material is free from silicone and crater-forming substances¹ (excluding HT material)

- Eaton strongly recommends the use of an insertion tool that facilitates the insertion of the filter bag into the bag filter housing and ensures the correct alignment of the filter bag inside the restrainer basket

Filter specifications

Materials

Needle felt polypropylene, polyester, nylon, wool, polytetrafluoroethylene (PTFE) or meta-Aramid (HT)

Seal rings

Sewn stainless steel or zinc-plated steel SNAP-RING seal ring

Retention ratings

1, 5, 10, 25, 50, 100, 200 µm

Dimensions/Parameters

Sizes

- 01: Ø 7 x 17" L (180 x 430 mm)
- 02: Ø 7 x 32" L (180 x 810 mm)
- 03: Ø 4 x 9" L (100 x 230 mm)
- 04: Ø 4 x 15" L (100 x 380 mm)

Filter area

- 01: 2.6 ft² (0.24 m²)
- 02: 5.2 ft² (0.48 m²)
- 03: 0.9 ft² (0.08 m²)
- 04: 1.7 ft² (0.16 m²)

Max. operating temperatures

Polypropylene: 230 °F (110 °C)
Polyester: 374 °F (190 °C)
Nylon: 374 °F (190 °C)
Wool: 275 °F (135 °C)
PTFE: 500 °F (260 °C)
HT: 401 °F (205 °C)

Max. differential pressure
36.2 psi (2.5 bar)

Recommended change-out pressure for disposal²
11.6 – 21.7 psi (0.8 – 1.5 bar)

Max. flow rates³

- 01: 88 GPM (20 m³/h)
- 02: 176 GPM (40 m³/h)
- 03: 26 GPM (6 m³/h)
- 04: 53 GPM (12 m³/h)



Powering Business Worldwide

SNAP-RING Filter Bag Range


Retention ratings

Materials	Codes	Retention ratings (µm)								Sewn SNAP-RING seal ring	Max. operating temperatures °F (°C)	Sizes			
		1	5	10	25	50	100	200	01			02	03	04	
Polypropylene	PO	■	■	■	■	■	■	■	■	S	230 (110)	■	■	■	■
Polyester	PE	■	■	■	■	■	■	■	■	S	374 (190)	■	■	■	■
Nylon	NY		■	■	■	■	■			S	374 (190)	■	■	■	■
Wool	W	■								S	275 (135)	■	■		
PTFE	PT	■	■	■						A	500 (260)	■	■		
Meta-Aramid	HT		■		■		■			A	401 (205)	■	■		



SNAP-RING seal ring

Ordering information

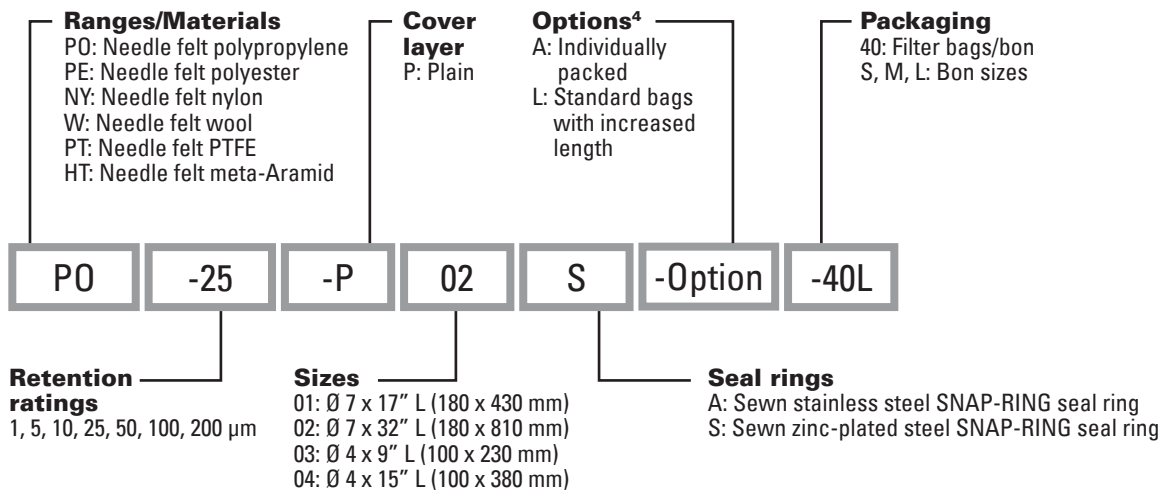

¹ Based on an accepted paint compatibility test (see document QUC-STA-10).

² Depending on the respective application requirements.

³ For liquids with a dynamic viscosity of 1 mPa·s @ 68 °F (20 °C)

⁴ Further options upon request (see document SAL-L-12).

North America
 44 Apple Street
 Tinton Falls, NJ 07724
 Toll Free: 800 656-3344
 (North America only)
 Tel: +1 732 212-4700

Europe/Africa/Middle East
 Auf der Heide 2
 53947 Nettersheim, Germany
 Tel: +49 2486 809-0

Internormen Product Line
 Friedensstraße 41
 68804 Altlußheim, Germany
 Tel: +49 6205 2094-0

Begerow Product Line
 An den Nahwiesen 24
 55450 Langenlonsheim, Germany
 Tel: +49 6704 204-0

China
 No. 3, Lane 280,
 Linhong Road
 Changning District, 200335
 Shanghai, P.R. China
 Tel: +86 21 5200-0099

Singapore
 4 Loyang Lane #04-01/02
 Singapore 508914
 Tel: +65 6825-1668

Brazil
 Av. Julia Gaioli, 474 – Bonsucesso
 07251-500 – Guarulhos, Brazil
 Tel: +55 11 2465-8822

For more information, please
 email us at filtration@eaton.com
 or visit www.eaton.com/filtration

© 2014 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US
 EF-FTB-10
 08-2014