

- Sizes 1- 1/2" to 8"
- Iron
- Threaded or flanged

Features

- Hand removable cover
- Drain plug
- Machined basket seat
- Perforated or mesh 316 stainless steel basket

Options

- Basket perforations from 1/32" to 1/2"
- Basket mesh from 20 to 400
- MONEL® baskets
- Vent valves
- Drain valves
- Gauge/vent taps 1/4" NPT
- Magnetic basket inserts
- Pressure differential gauges and switches

MONEL® is a registered trademark of Special Metals Corporation group of Companies.



The Eaton Model 30R is a high-quality, low cost simplex basket strainer—perfect for cost sensitive applications.

Whereas the cost of the Model 30R is low, its design incorporates many features found only on more expensive units, including machined basket seats to protect against bypass, ensuring all of the flow is strained. The cover of the Model 30R is a clamp type and is hand removable

without the need for tools. This makes access to the basket quick and easy for cleanings or changeouts and every size strainer comes standard with a drain plug.

The Model 30R is the best choice simplex strainer for low or moderate pressure applications such as swimming pools, cooling towers and large air conditioning installations.

Selection chart


Size	Material	End connections	Seals	Pressure rating*
1-1/2" to 3"	Iron	Threaded	Buna-N®	200 psi (13.8 bar)
1-1/2" to 8"	Iron	Flanged 125#	Buna-N	200 psi (13.8 bar)


^{* @ 100 °}F (38 °C)

C_V factors*

Size	Value	Size	Value
1-1/2"	58	4"	240
2"	90	6"	370
2-1/2"	140	8"	600
3"	200		

^{*} For water with clean, perforated basket

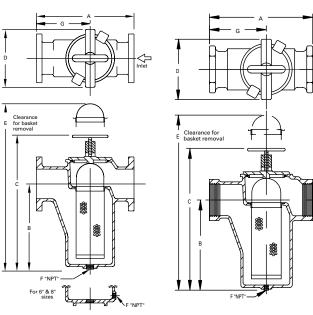

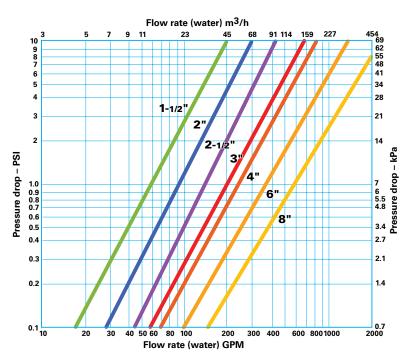

Dimensions and weights are for reference only. Contact Eaton for certified drawings.

Dimensions (in/mm) flanged

Pipe size	A	В	С	D	E	F	G	Dry wt (lb / kg)
1-1/2	7.75 / <mark>197</mark>	6.50 / <mark>165</mark>	10.63 / 270	6.00 / 152	14.88 / <mark>378</mark>	3/4	4.44 / <mark>113</mark>	12 / <mark>5.5</mark>
2	9.63 / 245	7.50 / 191	11.63 / 295	7.50 / 191	17.38 / 441	1-1/4	5.63 / 143	27 / 12.3
2-1/2	11.00 / 279	9.13 / 232	15.25 / <mark>387</mark>	8.00 / <mark>203</mark>	22.38 / 568	1-1/4	5.88 / 149	45 / 20.5
3	11.88 / 302	9.13 / 232	15.25 / 387	8.00 / <mark>203</mark>	22.38 / 568	1-1/4	6.50 / <mark>165</mark>	59 / 26.6
4	13.75 / 349	9.63 / 245	16.63 / 422	9.25 / <mark>235</mark>	30.00 / 762	1-1/2	8.44 / <mark>214</mark>	71 / 32.2
6	17.50 / <mark>445</mark>	12.38 / 315	26.13 / <mark>664</mark>	14.75 / <mark>375</mark>	35.00 / 889	2	10.31 / <mark>262</mark>	150 / <mark>68.1</mark>
8	23.63 / 600	17.75 / <mark>451</mark>	32.63 / 829	14.75 / <mark>375</mark>	48.00 / 1219	2	14.50 / 368	230 / 104.3

Dimensions (in/mm) threaded

Pipe size	Α	В	С	D	E	F	G	Dry wt (lb / kg)
1-1/2	7.00 / 178	6.50 / <mark>165</mark>	10.63 / <mark>270</mark>	6.00 / <mark>152</mark>	14.88 / <mark>378</mark>	³ / ₄ / <mark>20</mark>	3.88 / 99	7 / 3.2
2	8.50 / <mark>216</mark>	7.50 / 191	11.63 / 295	7.50 / <mark>191</mark>	17.38 / <mark>441</mark>	1-1/4 / 32	4.81 / 122	20 / 9.1
2-1/2	11.50 / 292	9.13 / 232	15.25 / <mark>387</mark>	8.00 / 203	22.38 / 568	1-1/4 / 32	6.00 / 152	34 / 15.5
3	11.50 / <mark>292</mark>	9.13 / 232	15.25 / <mark>387</mark>	8.00 / 203	22.63 / 575	1-1/4 / 32	6.00 / 152	34 / 15.5

North America

44 Apple Street Tinton Falls, NJ 07724 Toll Free: 800 656-3344 (North America only) Tel: +1 732 212-4700

Europe/Africa/Middle East Auf der Heide 2

53947 Nettersheim, Germany Tel: +49 2486 809-0

Internormen Product Line Friedensstraße 41 68804 Altlußheim, Germany Tel: +49 6205 2094-0

Begerow Product Line An den Nahewiesen 24 55450 Langenlonsheim, Germany Tel: +49 6704 204-0

China No. 3, Lane 280, Linhong Road Changning District, 200335 Shanghai, P.R. China Tel: +86 21 5200-0099

Singapore 4 Loyang Lane #04-01/02 Singapore 508914 Tel: +65 6825-1668

Brazil

Av. Julia Gaioli, 474 - Bonsucesso 07251-500 - Guarulhos, Brazil Tel: +55 11 2465-8822

For more information, please email us at filtration@eaton.com or visit www.eaton.com/filtration

© 2014 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete. since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.





